

Cable Reel 560



CAMERA CABLE REEL WITH SLIP RINGS

ahlbergs.staging.westart.se/products/cables/cable-reel-560



The Cable Reel 560 is a cable reel with slip rings used for camera cables. It is designed for fixed installation with placement on locations such as a refueling machine or fuel bridge.

MORE INFORMATION ABOUT CABLE REEL 560

APPLICATIONS

- For fixed installation on refueling machines and fuel bridges

BENEFITS

- Automatic tension control during winding and unwinding
- Equipped with ratchet
- Integrated camera cable connectors
- Specially designed for prolonging the camera cable lifetime through eliminating cable twisting in more than one direction
- Motorized cable reel is optional



SPECIFICATIONS

PHYSICAL CHARACTERISTICS

Drum Diameter	300 mm
Outer Diameter	550 mm
Maximum Cable Length	40 m
Weight Without Cable	35 kg
Width	324 mm
Slip Rings	Yes
Motorized Cable Reel	Speed and torque depends on payload and cable length, 30kg payload = 0,2 m/s Powered by 2A@24VDC Position feedback and memorized positioning possible

We reserve the right to alter specifications without prior notice

CABLE REEL 560 IMAGES

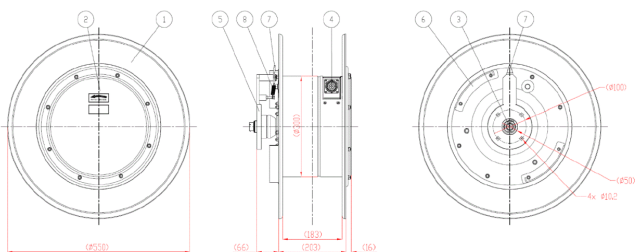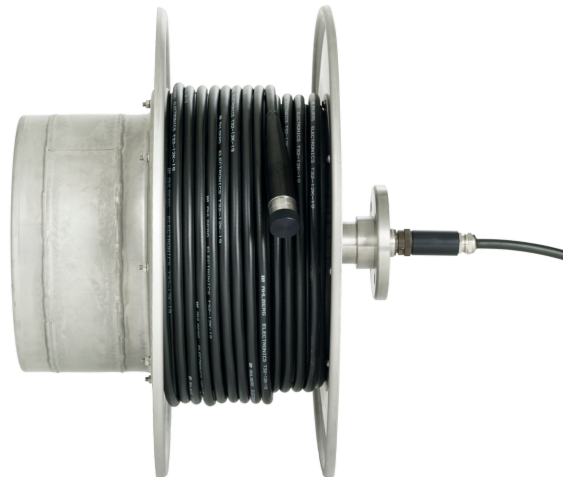

We reserve the right to alter specifications without prior notice